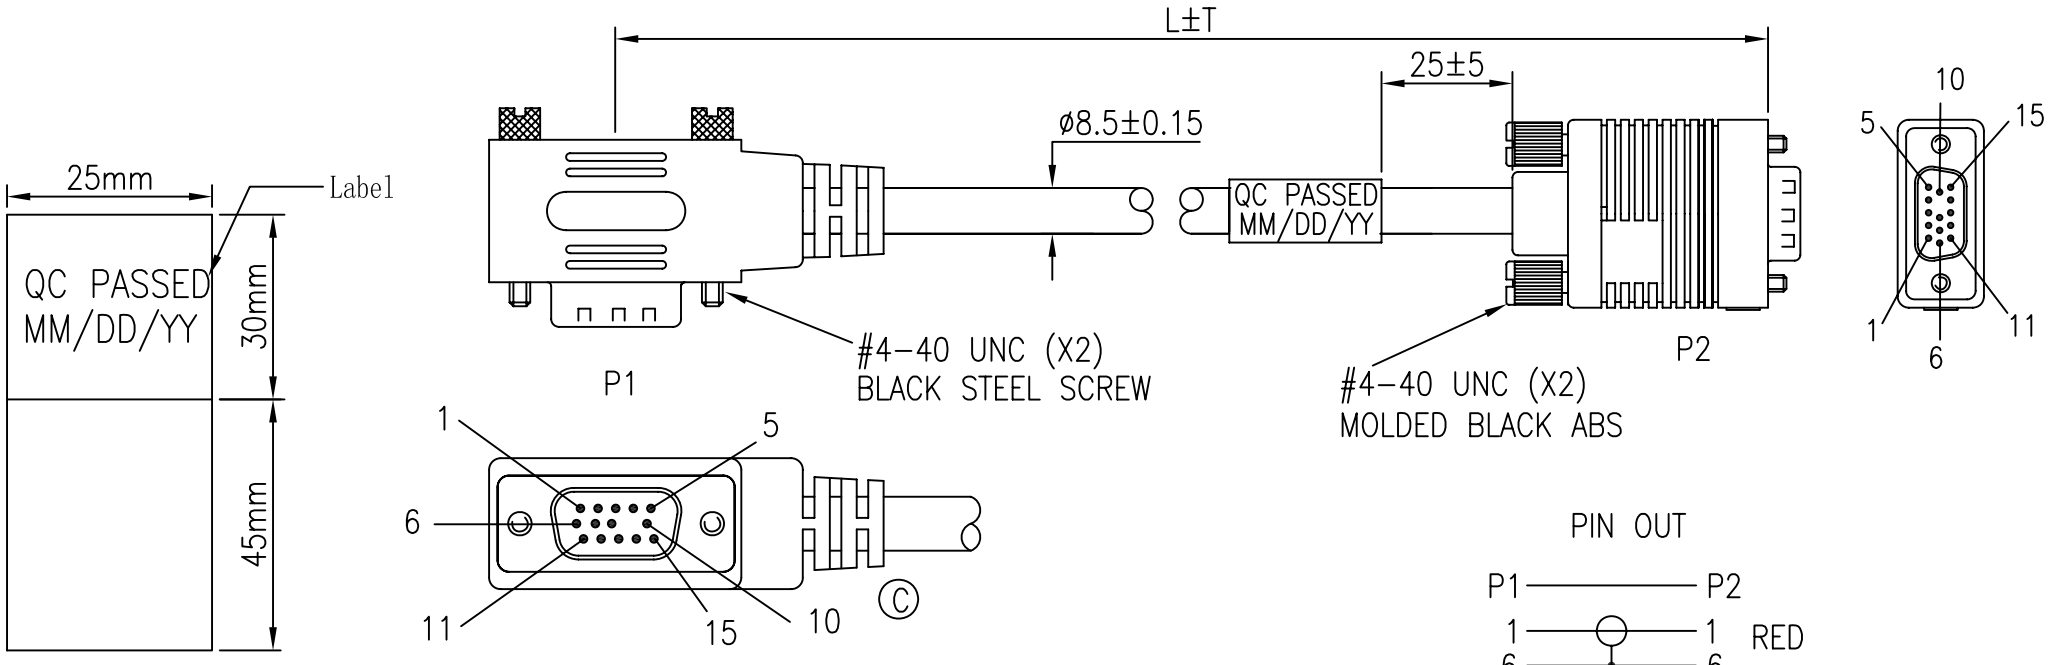

NOTE:

1. CABLE: {(28AWG X 3COAX, EACH COAX SPIRIAL SHIELDED, 75Ω, COLOR CODE: RED, GREEN, BLUE) + (24AWG X 2PAIRS + 24AWG X 4C)], OVERALL: AL-FOIL AND BRAID(85%MIN) SHIELDED WITH A DRAIN WIRE, UL2919, BLACK(TNT-BK) PVC JACKET.SLOT ø8.5±0.15MM.
2. CONNECTOR: P1 & P2: HIGH DENSITY D-SUB 15PIN MALE: THE 9TH UNLOADED, SOLDER TYPE, GOLD FLASH CONTACTS, BLACK PBT INSULATION.
3. BLACK METAL SCREW.(MATERIAL: STEEL)
4. THUMB SCREW TO BE MOLDED BLACK (TNT-BK) ABS.
5. SHIELDING: COPPER-FOIL TAPE COVER PREMOLD AND 360° SOLDER TO CONNECTOR SHELL AND CABLE BRAID.
6. ALL HOOD MOLDED BLACK(TNT-BK) PVC.
7. TESTING: 100% ELECTRICAL TEST: 1M OHM/MAX INSULATION RESISTANCE. 3 OHM/MIN CONTACTOR AT DC 300V
8. PACKING: EACH CABLE IN A PRINTED "TNT" POLY-BAG. LABEL(WHITE BACKGROUND WITH BLACK LETTERS) TO BE STAMPED ON THE PRINTED "TNT" POLY-BAG

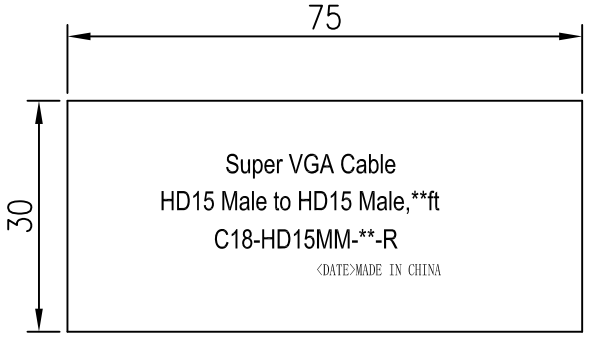

"**" SEE CHART 1

PIN OUT

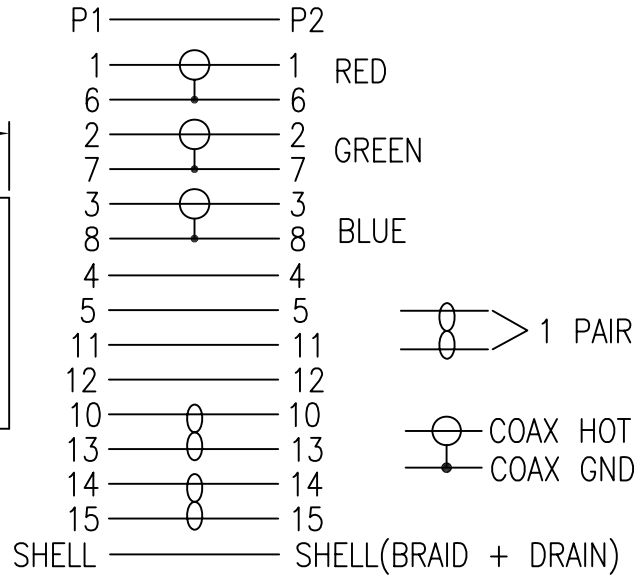

CHART 1

P/N	**	L(mm)	T(mm)
C18-HD15MM-06-R	06	1829	+152/-51
C18-HD15MM-10-R	10	3048	+152/-51
C18-HD15MM-15-R	15	4572	+152/-51
C18-HD15MM-25-R	25	7620	+152/-51

RoHS COMPLIANT

TOLERANCE	INCHES	M/M
.X	.015	.30
.XX	.010	.10
.XXX	.005	.05

Tri-Net Technology,Inc.
http://www.trinetusa.com

SCALE	NONE	REV	D
UNIT	MM		
SHEET	1/2	DWG NO.	
DATE	09/12/06		
DRAWN BY			
CHECK BY		TITLE	HDB15M(90度) TO HDB15M(180度)
APPD BY		PART NO.	C18-HD15MM-XX-R