

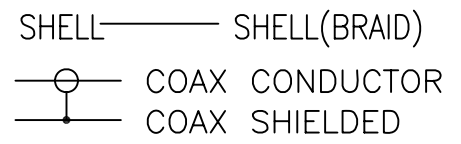


CHART 1:

P/N	**	xx	L	T
C28-MDIN4-MM-03	3	03	914	±30
C28-MDIN4-MM-06	6	06	1829	±51
C28-MDIN4-MM-10	10	10	3048	±51
C28-MDIN4-MM-12	12	12	3658	±51
C28-MDIN4-MM-25	25	25	7620	+152/-51
C28-MDIN4-MM-50	50	50	15240	+305/-152
C28-MDIN4-MM-75	75	75	22860	+305/-152
C28-MDIN4-MM-80	80	80	24384	+305/-152
C28-MDIN4-MM-100	100	100	30480	+305/-152



- NOTE:
- CABLE: UL2919 28AWG*2COAX(UL1354 75ohm)+AL-FOIL SHIELDED WITH DRAIN WIRE +BRAID SHIELDED+BLACK PVC JACKET. OD:7.0±0.15mm.
 - CONNECTOR: P1 & P2: MINI DIN 4PIN MALE: SOLDER TYPE, GOLD FLASH CONTACTS.
 - SHIELDED: COPPER FOIL TAPE COVER PREMOLD AND 360° SOLDER TO CONNECTOR SHELL AND CABLE BRAID.
 - ALL HOOD: MOLDED BLACK PVC.
 - PACKING: EACH CABLE IN A TNT PRINTED POLY-BAG. BAR CODE LABEL TO BE STAMPED ON POLYBAG.



TOLERANCE			Tri-Net Technology, Inc. http://www.trinetusa.com			
INCHES		M/M				
.X	.015	.30	SCALE	NONE	REV	A
.XX	.010	.10	UNIT	MM		
.XXX	.005	.05	SHEET	1/1	DWG NO.	
DRAWN BY			DATE	03/10/06		
CHECK BY			TITLE	MD4/M TO MD4/M		
APPD BY			PART NO.	C28-MDIN4-MM-XX		