


BILL OF MATERIAL:

ITEM	DESCRIPTION	QT' Y	UNIT
①	CABLE: UL2919 28AWG (1354)*3COAX+24AWG*5C+1+B JACKET: PVC. COLOR :BLACK OD=8.0mm	1	PCS
②	CONN. : 13W3 MALE BLACK INSULATION.	1	PCS
③	CONN. : HD15PIN FEMALE BLACK INSULATION.	1	PCS
④	INNER MOLDED WITY PE.	15	G
⑤	PAPER: 22*100mm	1	PCS
⑥	PAPER: 22*80mm	1	PCS
⑦	POPER FOIL: 22*100mm 360° SOLDER	1	PCS
⑧	POPER FOIL: 22*80mm 360° SOLDER	1	PCS
⑨	OUTER MOLDED WITH BLACK PVC(45P)	79	G
⑩	FERRIET CORE: $\phi 17.5*28.5*\phi 9.5\text{mm}$	2	PCS
⑪	SCREW: #4*40UNC 4*30.5mm	2	PCS
⑫	SCREW: #4.5*40.5mm	2	PCS

PIN OUT:

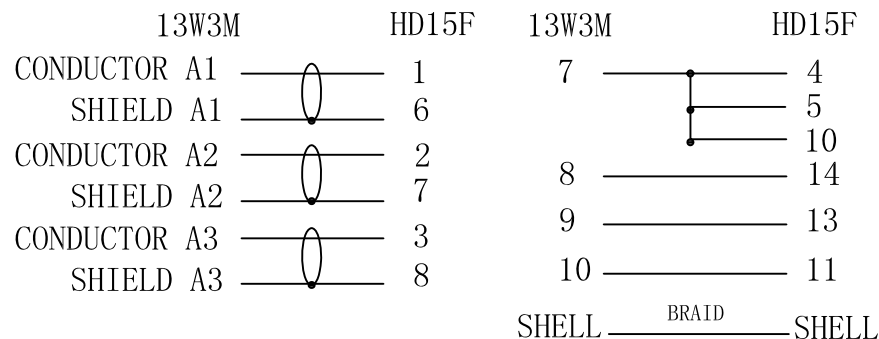

TOLERANCE INCHES			M/M		Tri-Net Technology, Inc. http://www.trinetusa.com			
.X	.015	.30	SCALE	NONE		REV	A	
.XX	.010	.10	UNIT	MM				
.XXX	.005	.05	SHEET	1/1	DWG NO.			
DRAWN BY			DATE	03/10/06	TITLE			
CHECK BY			13W3M/HD15F					
APPD BY			PART NO. E04-13W3M-HD15F-01					