


XX±YY

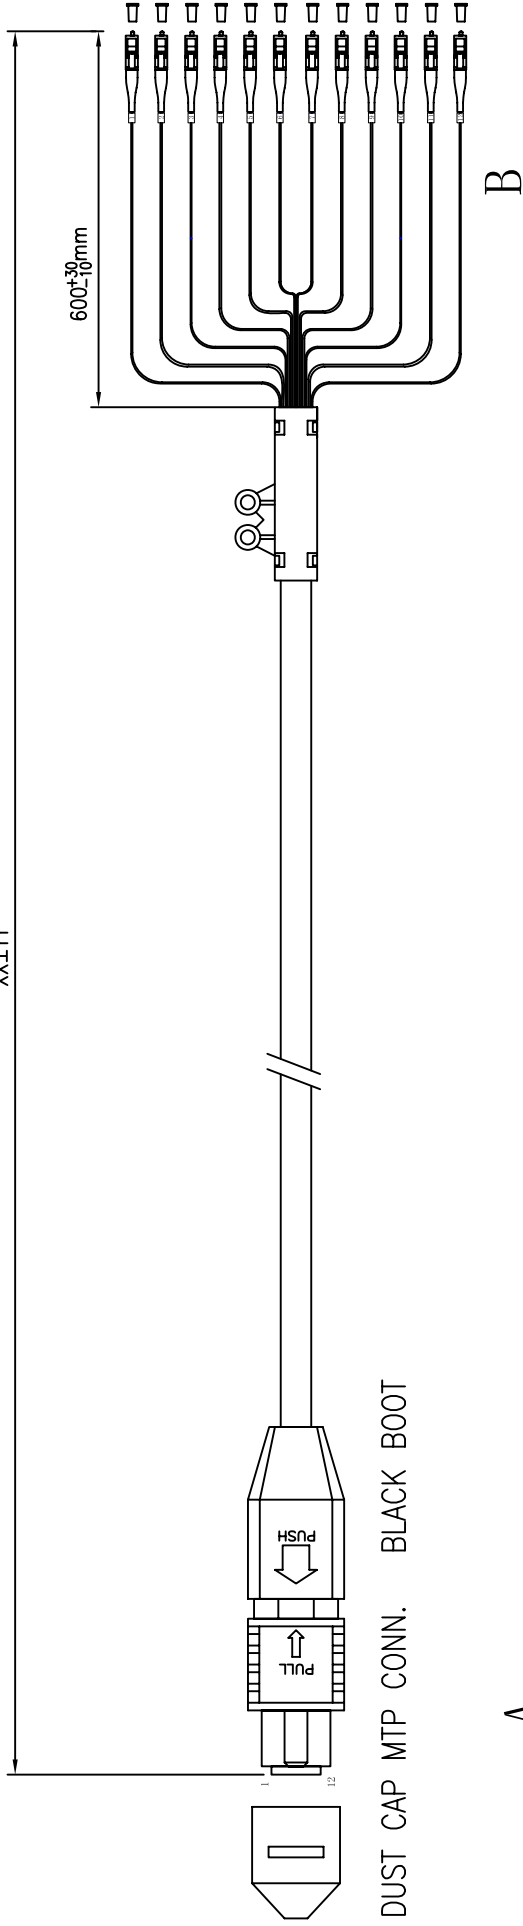


DUST CAP MTP CONN. BLACK BOOT

A

STRAIGHT

A	B
1 BLUE	1 BLUE
2 ORANGE	2 ORANGE
3 GREEN	3 GREEN
4 BROWN	4 BROWN
5 SLATE	5 SLATE
6 WHITE	6 WHITE
7 RED	7 RED
8 BLACK	8 BLACK
9 YELLOW	9 YELLOW
10 VIOLET	10 VIOLET
11 ROSE	11 ROSE
12 AQUA	12 AQUA

Coupler Right view



XX	YY
XX ≤ 1M	±50mm
XX > 1M	±100mm

Specification:

- Connector A MTP 12 Core M/M
- Connector B LC/PC MM 0.9 White Boot*12
- Cable Type 12*0.9 Empty Loose Tube 62.5/125um
- Coupler 12 FIBERS RIBBON CABLE M/M
- Length 12 core, $\phi 0.9$
- Jacket Color ORANGE
- Insertion Loss < 0.70 dB

A	INITIAL RELEASE	2/1/08
REV	DESCRIPTION OF CHANGE	DATE
Tri-Net Technology, Inc. http://www.trinetusa.com		
TOLERANCE INCHES	M/M	
.X	.015	.30
.XX	.010	.10
.XXX	.005	.05
DRAWN BY	start	
CHECK BY		
APPD BY		
SHEET DATE 1/1 2/1/08		DWG NO.
TITLE		MTP to 12*0.9 LC Multimode Fiber cable
PART NO.		898-MTP-LC-M-XX

