

P1


P2

KEY POSITION

CAP

WIRE CONNECTION


P/N	FT	T(INCH)
EZ01-C-15	15	+6/-2
EZ01-C-25	25	+6/-2
EZ01-C-35	35	+6/-2
EZ01-C-50	50	+6/-2
EZ01-C-75	75	+12/-6
EZ01-C-100	100	+12/-6

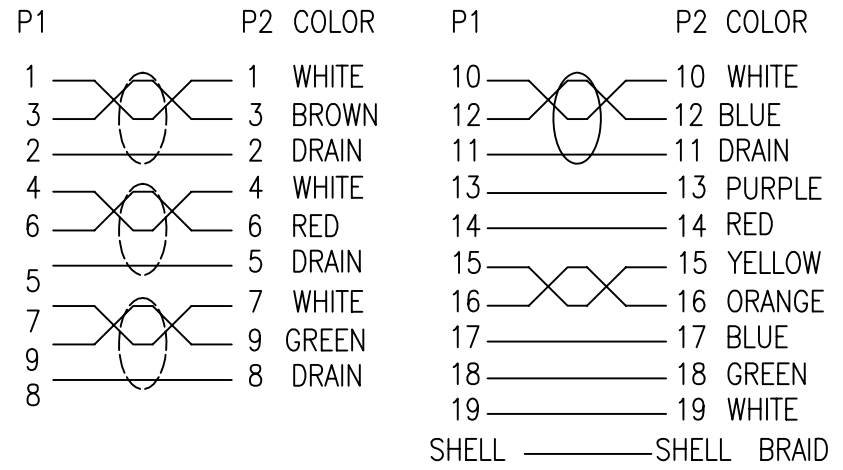

- NOTE:
- 1.CABLE:UL20276 (28AWG\*1P+D-Free-edge-AL)\*4C+28AWG\*1P+28AWG\*5C+AB JACKET COLOR:BLACK OD:7.3±0.15mm,
  - 2.CONNECTOR: P1&P2: DIN 19P FEMALE, SOLDER TYPE, TINNED PLATED CONTACTS, INSULATION: BLACK, NICKEL PLATED SHELL.
  - 3.DIN CAP:BRASS,NICKEL PLATED.
  - 4.ALL HOOD: MOLDED YELLOW(02) 45P PVC.
  - 5.SHIELDED: COPPER FOIL TAPE COVER PREMOLD AND 360° SOLDER TO CONNECTOR SHELL AND CABLE BRAID.
  - 6.100% OPEN AND SHORT TESTING.
  - 7.MOLD NO: D14F-N01, D14F-01.



A	INITIAL RELEASE		11/22/07		
REV	DESCRIPTION OF CHANGE		DATE		
TOLERANCE		Tri-Net Technology, Inc. <a href="http://www.trinetusa.com">http://www.trinetusa.com</a>			
.X	.015				.30
.XX	.010				.10
.XXX	.005				.05
DRAWN BY	LUCY		SHEET	1/2	
			DATE	11/22/07	
CHECK BY	TITLE DIN19F TO DIN19F 28AWG				
APPD BY	PART NO. EZ01-C-XX				

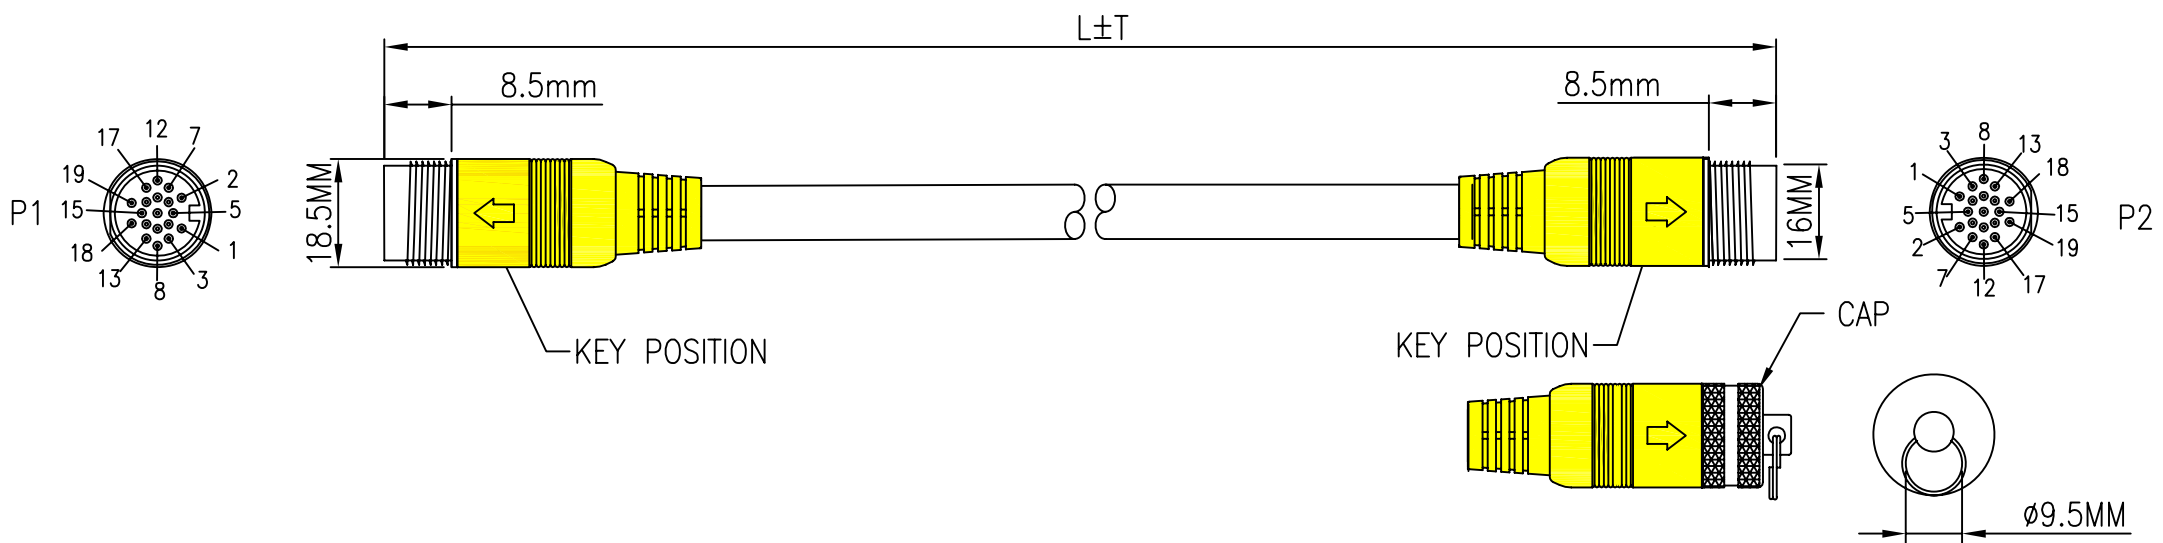

P/N	L(MM)	T(MM)
EZ01-C-125	125	+12/-6
EZ01-C-150	150	+12/-6

NOTE:

- 1.CABLE:UL20276 (24AWG\*1P+D-Free-edge-AL)\*4C+24AWG\*1P+24AWG\*5C+AB JACKET COLOR:BLACK OD:10±0.15mm,
- 2.CONNECTOR: P1&P2: DIN 19P FEMALE, SOLDER TYPE, TINNED PLATED CONTACTS, INSULATION: BLACK, NICKEL PLATED SHELL.
- 3.DIN CAP:BRASS,NICKEL PLATED.
- 4.ALL HOOD: MOLDED YELLOW(02) 45P PVC.
- 5.SHIELDED: COPPER FOIL TAPE COVER PREMOLD AND 360° SOLDER TO CONNECTOR SHELL AND CABLE BRAID.
- 6.100% OPEN AND SHORT TESTING.
- 7.MOLD NO: D14F-N01, D14F-01.

P1	P2	COLOR	P1	P2	COLOR
1	1	WHITE	10	10	WHITE
3	3	BROWN	12	12	BLUE
2	2	DRAIN	11	11	DRAIN
4	4	WHITE	13	13	PURPLE
6	6	RED	14	14	RED
5	5	DRAIN	15	15	YELLOW
7	7	WHITE	16	16	ORANGE
9	9	GREEN	17	17	BLUE
8	8	DRAIN	18	18	GREEN
			19	19	WHITE
			SHELL	SHELL	BRAID



A	INITIAL RELEASE		11/22/07	
REV	DESCRIPTION OF CHANGE		DATE	
TOLERANCE		Tri-Net Technology, Inc. <a href="http://www.trinetusa.com">http://www.trinetusa.com</a>		
.X	.015	.30	SCALE	NONE
.XX	.010	.10	UNIT	MM
.XXX	.005	.05	REV A	
DRAWN BY	LUCY		SHEET	2/2
CHECK BY			DATE	11/22/07
APPD BY			TITLE	DIN19F TO DIN19F 24AWG
			PART NO.	EZ01-C-XX