


APPROVED BY _____
 COMPANY: _____
 PURCHASING/ENGINEER: _____
 DATE: _____

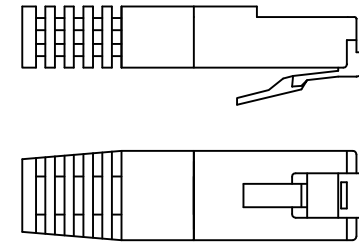

P/N	L(FT)	L(MM)	T
CAT6-UTP-RIGHT-1	1FT	305MM	+15/-15MM
CAT6-UTP-RIGHT-3	3FT	915MM	+25/-25MM
CAT6-UTP-RIGHT-5	5FT	1524MM	+25/-25MM
CAT6-UTP-RIGHT-7	7FT	2134MM	+50/-50MM
CAT6-UTP-RIGHT-10	10FT	3048MM	+50/-50MM
CAT6-UTP-RIGHT-15	15FT	4572MM	+100/-50MM
CAT6-UTP-RIGHT-25	25FT	7620MM	+150/-50MM

WIRE CONNECTION

WIRE COLOR	P1	PAIRS	P2
WHITE/ORANGE	1	=====	1
ORANGE	2	=====	2
WHITE/GREEN	3	=====	3
BLUE	4	=====	4
WHITE/BLUE	5	=====	5
GREEN	6	=====	6
WHITE/BROWN	7	=====	7
BROWN	8	=====	8

NOTES:

- CABLE:UTP CAT.6 CABLE.4P*24AWG(7/0.203)(STRANDED BARE COPPER. INSULATION:HD-PE.OD:0.95±0.05MM)+OUTER JACKET: BLUE PVC.OD:6.2±0.15MM.P/N:06G-R4P-T24-BL-TPL.
- CONN.: P1,P2: 8P8C PLUG, LONG BODY, DOUBLE LAY. GOLD PLATED 3U", TWO PARTS.P/N:060-R88-T3-24AWG.
- ALL HOOD MOLDED BLUE 60P PVC.
- CABLE ASS'Y MUST PASS CONTINUITY TEST.
- MOLD NO: TNT-88-18, TNT-88-36.



A	INITIAL RELEASE		07/15/11				
REV	DESCRIPTION OF CHANGE		DATE				
TOLERANCE INCHES		M/M	Tri-Net Technology, Inc. Total Network Telesis U.S.A.				
.X	.015	.30					
.XX	.010	.10					
.XXX	.005	.05	SCALE	NONE		REV	A
DRAWN BY		Tiger	UNIT	MM			
CHECK BY			SHEET	1/1	DWG NO.		
APPD BY			DATE	06/29/11	TITLE		
			8P8C PLUG(90°,LEFT) TO 8P8C PLUG(180°)				
			PART NO. 05GE-LENGTH-LS-A-COLOR				