


P1 DP20M

P2 DVI(24+5)F



PCB

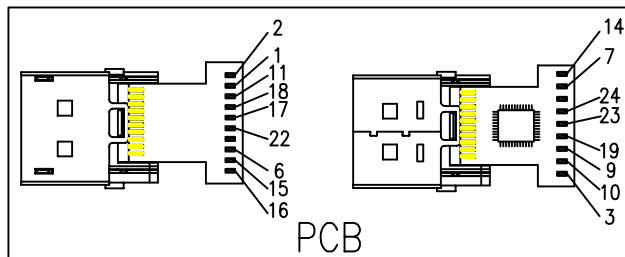

WIRE CONNECTION

PCB	P2	COLOR	PCB	P2	COLOR
1	1	WHITE	17	17	WHITE
2	2	RED	18	18	BLUE
3	3	DRAIN	19	19	DRAIN
6	6	PURPLE	22	22	WHITE
7	7	RED	23	23	BROWN
9	9	WHITE	24	24	DRAIN
10	10	GREEN			
11	11	DRAIN			
14	14	YELLOW			
15	15	ORANGE			
16	16	WHITE			
			SHELL	SHELL	BRAID

NOTE:

- 1.CABLE: DVI SINGLE LINK CABLE:UL20276 (1P*28AWG+D+AL/MYLAR)*4C+1P*28AWG +3C*28AWG+AEB JACKET COLOR:BLACK OD:7.0±0.15mm.
- 2.CONNECTOR: P1: DISPLAYPORT 20P MALE, GOLD PLATED CONTACTS, INSULATION:BLACK, NICKEL PLATED SHELL, ASSEMBLY TYPE. P2: DVI 24+5 FEMALE,GOLD PLATED CONTACTS, INSULATION WHITE ,NICKEL PLATED SHELL.
- 3.P1 HOOD: DISPLAYPORT BLACK HOOD.
- 4.P2 HOOD: MOLDED WHITE PVC
- 5.100% ELECTRICAL TESTING.



A	INITIAL RELEASE		11/10/09	
REV	DESCRIPTION OF CHANGE		DATE	
TOLERANCE INCHES		M/M	Tri-Net Technology, Inc. http://www.trinetusa.com	
.X	.015	.30		
.XX	.010	.10		
.XXX	.005	.05	SCALE	NONE
			UNIT	MM
DRAWN BY		May	SHEET	1/1
			DATE	11/10/09
CHECK BY			TITLE	
			DISPLAYPORT TO DVI24+5F	
APPD BY			PART NO.	
			R06-CVT-DVI	