


APPROVED BY \_\_\_\_\_  
 COMPANY: \_\_\_\_\_  
 PURCHASING/ENGINEER: \_\_\_\_\_  
 DATE: \_\_\_\_\_

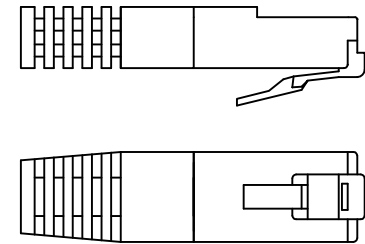

P/N	L(FT)	L(MM)	T
CAT5E-UTP-UP-1	1FT	305MM	+15/-15MM
CAT5E-UTP-UP-3	3FT	915MM	+25/-25MM
CAT5E-UTP-UP-5	5FT	1524MM	+25/-25MM
CAT5E-UTP-UP-7	7FT	2134MM	+50/-50MM
CAT5E-UTP-UP-10	10FT	3048MM	+50/-50MM
CAT5E-UTP-UP-15	15FT	4572MM	+100/-50MM
CAT5E-UTP-UP-25	25FT	7620MM	+150/-50MM

WIRE CONNECTION

WIRE COLOR	P1	PAIRS	P2
WHITE/ORANGE	1	=====	1
ORANGE	2	=====	2
WHITE/GREEN	3	=====	3
BLUE	4	=====	4
WHITE/BLUE	5	=====	5
GREEN	6	=====	6
WHITE/BROWN	7	=====	7
BROWN	8	=====	8

REMARK:

- CABLE:UTP CAT.5E CABLE.4P\*24AWG(7/0.16)(STRANDED BARE COPPER.INSULATION:HD-PE.OD:0.81±0.05mm)+ OUTER JACKET:BLUE PVC.OD:5.0±0.15mm.(TRIPP LITE MARKING) TNT P/N:(06F-R4P-T26-BL-TPL)
- CONN.: P1,P2:8P8C PLUG, LONG BODY, DUBLE LAY. GOLD PLATED 3U", TWO PARTS.P/N:060-R88-T3-26AWG
- ALL HOOD MOLDED BLUE 60P PVC.
- CABLE ASS'Y MUST PASS CONTINUITY TEST.
- MOLD NO: TNT-88-18,TNT-88-38.



A	INITIAL RELEASE		07/15/11		
REV	DESCRIPTION OF CHANGE		DATE		
TOLERANCE INCHES		M/M	 <b>Tri-Net Technology, Inc.</b> <i>Total Network Telesis U.S.A.</i>		
.X	.015	.30			
.XX	.010	.10			
.XXX	.005	.05	SCALE	NONE	 REV A
			UNIT	MM	
DRAWN BY		Tiger	SHEET	1/1	DWG NO.
			DATE	06/29/11	
CHECK BY			TITLE		
APPD BY			8P8C PLUG(90°,UP) TO 8P8C PLUG(180°)		
			PART NO.		
			05BE-LENGTH-US-A-COLOR		